




Micro G Switch Side Contact Model AT-350-S7

FEATURES:


- Small and Lightweight – 3.4 mm²
- Extremely Fast Response Times
- High Shock Survivability – 65,000+ g
- Surface Mount – Au over Ni Pads
- Tape and Reel Packaging
- Hermetic Seal

APPLICATIONS:

- Impact Detection
- Arming / Fuzing
- Artillery, Launch
- More

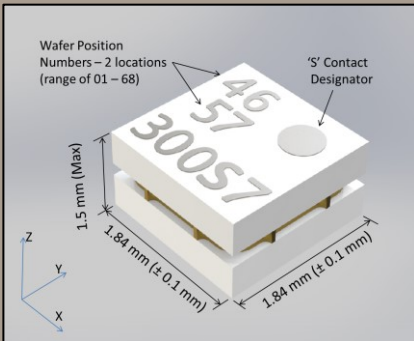

AT-300-S7 Device Dimensions

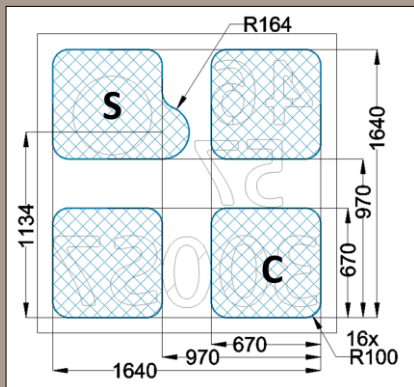

AT-300-S7 Pad Dimensions (micrometers) as viewed from pad side of device

Specifications

OPERATING CHARACTERISTICS:

| | | |
|--------------------------------------|---|----|
| Sensitivity | -Y axis ± 35 degrees (parallel to XY Plane/PCB) | |
| Contact Acceleration Threshold | 300 ± 75 | g |
| Contact Type (4) | Normally Open, Non-Latching | |
| Response Time (2) (3) | < 225 | µs |
| Reset | Automatic with g decay | |

ELECTRICAL CHARACTERISTICS

| | | |
|------------------------------------|------|------|
| Contact Resistance (1) | < 10 | ohms |
| Insulation Resistance (min.) | 1000 | Mohm |
| Breakdown Voltage | >200 | VDC |

ENVIRONMENTAL RATINGS:

| | | |
|---------------------------------|-------------|----|
| Operate Temperature Range | -55 to +125 | °C |
| Storage Temperature Range | -55 to +125 | °C |
| PCB/Pad Shear Force | > 20 | N |
| Shock Survival (5) | >65000 | g |

PHYSICAL CHARACTERISTICS:

| | | |
|----------------------------------|-------------------|-----------------|
| Nominal Dimensions (LxWxH) | 1.84 x 1.84 x 1.3 | mm |
| Volume | 3.7 | mm ³ |
| Mass | 20 | milligrams |
| ROHS Compliant ? | Yes | |

- (1) Contact resistance is dependent on input pulse acceleration level.
- (2) Response time depends upon input pulse profile.
- (3) Response time for a 600g acceleration step input.
- (4) Electrical connection between pads S (side) and C (common) is normally open and is closed while acceleration is greater than the contact acceleration threshold.
- (5) The Micro G Switch devices are designed to survive the extreme high shock environments associated with artillery launch events.

Note that the information on this data sheet is for reference only.

As each application may have unique requirements, please verify the specifications as well as suitability of using our products in your applications by consulting our engineering department.

This product and related technical data are controlled for export by the International Trade in Arms Regulations. Any sale, export, transfer or re-sale, in any form, requires the prior written approval of the U.S. Department of State.